

complied with
EN-1176-1:2017
standard




Safety
Quality
Functionality




www.tuv.com
ID 0000089459

Users 3-12 years: 7
Required surface: 45m²
Approx. assembly time: 6 h

The shock-absorbing properties of the playground surface must comply to the requirements of **EN-1176** and/or **EN-1177**. Suitable materials include rubber, mulch, sand, grass, and gravel, provided they are rated for a critical fall height of **1.5m** or greater.




x1




x1 *




x1

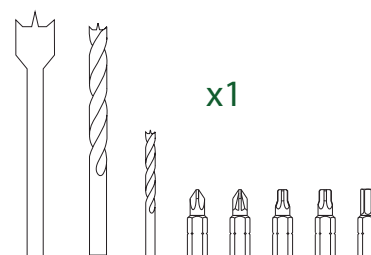


x1




x79 *

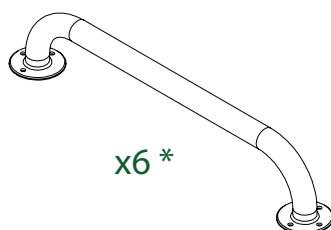


x6 *




x1

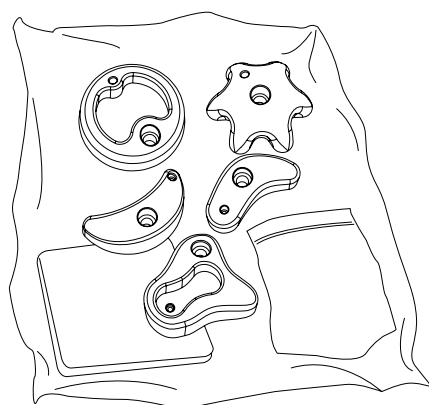

x2 *

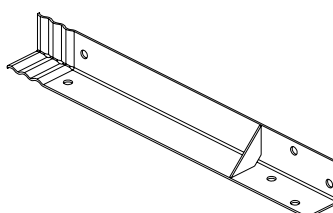


x4 *

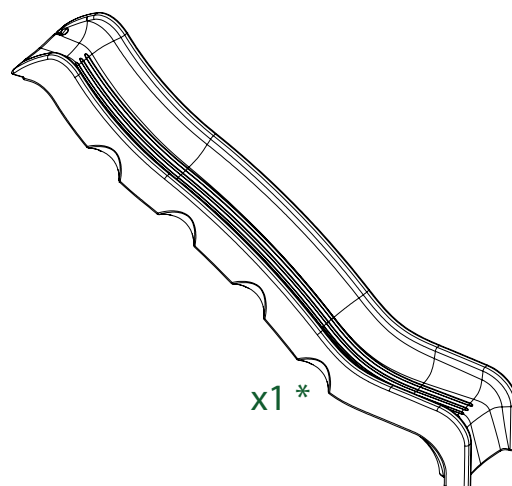

x1 *

* spare parts available and comply with the manufacturer's specifications

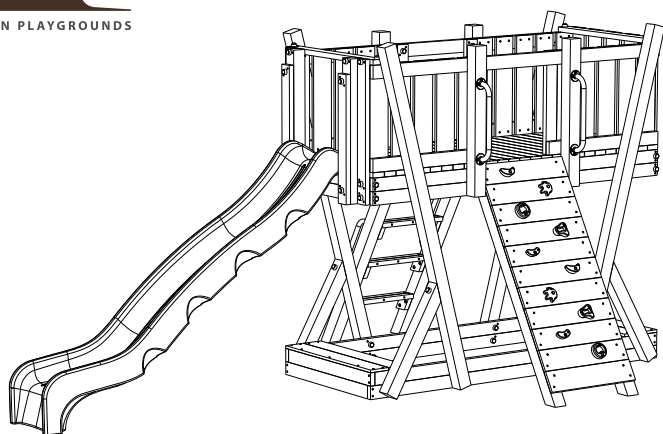


270 x 472 x 234 cm

Free height of fall - **1,5m**

Timber is pressure-impregnated.
Additional protection may be required.

Only for outdoor use!

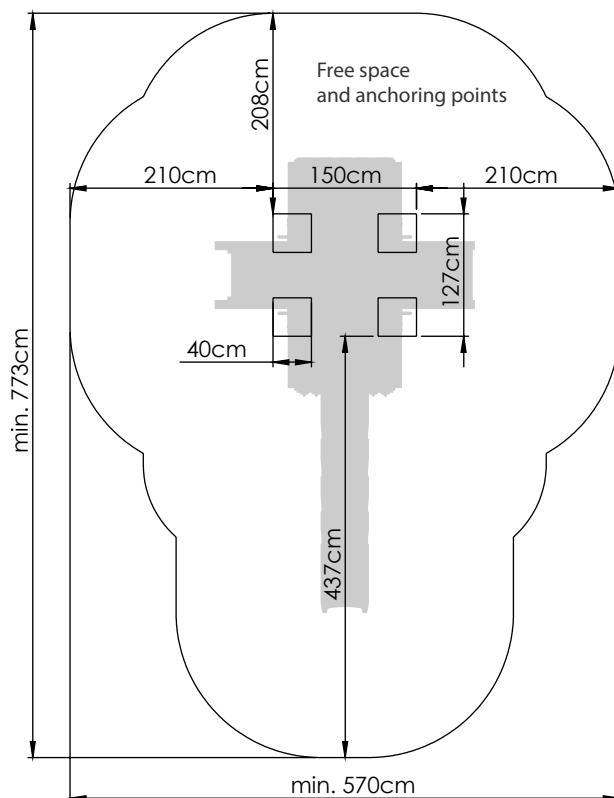

Timber kit is cut to size and manufactured according to FSC standard, high pressure impregnated.

Wood cross sections:

- 90 x 90 mm
- 35 x 90 mm
- 32 x 58 mm
- 19 x 145 mm

Largest part: slide (280 x 50 x 44 cm)

Heaviest part: slide (22 kg)

Timber package: 1

Slide (green): 1

SKU: P-10270-P-K-GX-1

Product dimensions: 270 x 472 x 234 cm

Timber weight: 287 kg

Concrete required: 140 l / ~200 kg

Note:

Assembled product must be anchored according to assembly manual included!

**140 l
200 kg**



Apila Sp. z o.o.
ul. Jagodowa 92
62-002 Suchy Las
Poland
funforte.eu
cs@funforte.eu